

Solar Parking • Carport LS-2

A double carport canopy for south-north orientation




Carport LS-2 - 10 Degrees Inclination



- **Long span up to 15 meters** - provides uninterrupted access.
- **Hidden foundation** - no concrete bollards required
- **Kits** for double glass or standard PV modules
- **Hidden inverter** – an elegant, safe and accessible solution
- **Hidden drainage** – downpipes are incorporated into support columns.



BLUETOP
solar parking

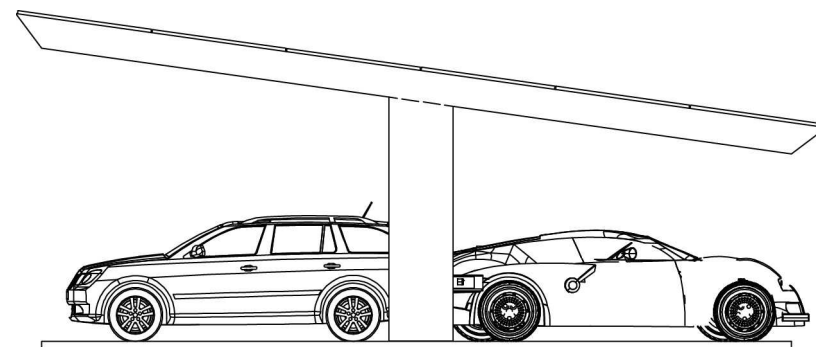

Bluetop Long Span Solar Carports...

...is a range of standardized carport designs. The innovative structures are the basis for SOLAR PARKING - long lasting green utilization of your parking area. The structures are being supplied as complete kits and solutions for all common PV-panels.

Innovative product

New patented manufacturing techniques combined with innovative designs makes solar parking affordable and attractive !

Installation

The roof structures including the PV-panels are assembled on ground level to optimize security and costs.

Materials

Posts, side rafters, sheets: hot galvanized according to DIN EN ISO-1461
Roof-profiles made of zinc-magnesium in accordance to DIN 55928-8
PV-mounting system: stainless steel or aluminium.


	Configuration*				Measurements (mm)				
Horizontal mounting	Cars*	Modules	Layout	kWp	L1	L2	W	H1	H2
LS2-SH70	5.6	40	10x4	10.4	6930	6330	10155	2100	3750
LS2-SH85	6.8	50	10x5	13	8620	8020	10155	2100	3750
LS2-SH105	8.4	60	10x6	15.6	10310	9710	10155	2100	3750
LS2-SH120	9.6	70	10x7	18.2	12000	1140	10155	2100	3750
LS2-SH125	10	70	10x7	18.2	12500	11900	10155	2100	3750
LS2-SH135	10.8	80	10x8	20.8	13690	13090	10155	2100	3750
LS2-SH155	12.4	90	10x9	23.4	15380	14780	10155	2100	3750

Vertical mounting	Cars*	Modules	Layout	kWp	L1	L2	W	H1	H2
LS2-S75	6	42	6x7	11	7564	6964	10155	2100	3750
LS2-S85	6.8	48	6x8	12.4	8578	7978	10155	2100	3750
LS2-S95	7.6	54	6x9	14	9592	8992	10155	2100	3750
LS2-S105	8.4	60	6x10	15.6	10606	10006	10155	2100	3750
LS2-S115	9.2	66	6x11	17.2	11620	11020	10155	2100	3750
LS2-S125	10	72	6x12	18.8	12634	12034	10155	2100	3750
LS2-S135	10.8	78	6x13	20.2	13648	13048	10155	2100	3750
LS2-S145	11.6	84	6x14	21.8	14662	14062	10155	2100	3750

Vertical transparent mounting	Cars*	Modules	Layout	kWp	L1	L2	W	H1	H2
LS2-F75	6	42	6x7	11	7564	6964	10155	2100	3750
LS2-F85	6.8	48	6x8	12.4	8578	7978	10155	2100	3750
LS2-F95	7.6	54	6x9	14	9592	8992	10155	2100	3750
LS2-F105	8.4	60	6x10	15.6	10606	10006	10155	2100	3750
LS2-F115	9.2	66	6x11	17.2	11620	11020	10155	2100	3750
LS2-F125	10	72	6x12	18.8	12634	12034	10155	2100	3750
LS2-F135	10.8	78	6x13	20.2	13648	13048	10155	2100	3750
LS2-F145	11.6	84	6x14	21.8	14662	14062	10155	2700	3750

* Figures for solar are based on 60-cells, 260 Wp modules. Maximum size: 168x100 cm

* Number of cars is just a guide, based on 2.5m per car

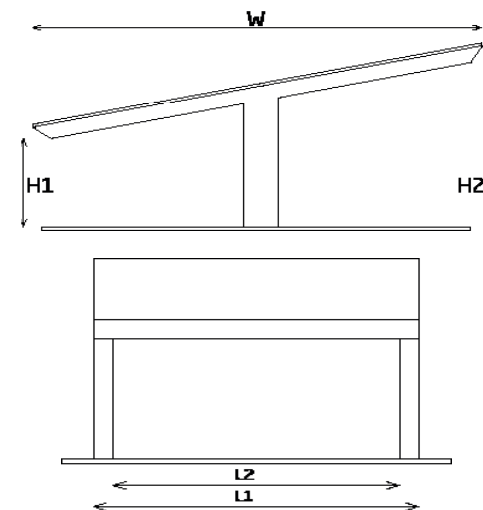

Structural Standards

Standard structural conditions: Weight solar panels and mounting system: $G_k = 0,15 \text{ kN/m}^2$; Snow: $S_k = 0,8 \text{ kN/m}^2$ / Wind: $q_{max,k} = 0,64 \text{ kN/m}^2$.

Structural construction: EN 1990:2007, 2. edition, based on EN 1990 A1:2006, DS/EN 1990 A1/AC:2010, EN 1990 DK NA:2013. W

Snow load: EN 1991-1-3:2007, 2. edition, based on EN 1991-1-3/AC:2009, EN 1991-1-3 DK NA:2012.

Wind load: EN 1991-1-4 2007, 2. edition, based on EN 1991-1-4/A1:2010, EN 1991-1-4 DK NA:2010, EN 1991-1-4 DK NA:2010 addition 1:2010, DS/EN 1991-1-4/AC:2010.

Accident load: EN 1991-1-7:2007, 2. edition, based on EN 1991-1-7/AC:2010, EN 1991-1-7 DK NA:2013.

Steel construction: EN 1993-1-1 + AC:2007, 2. edition, based on EN 1993-1-1 AC/2009, EN 1993-1-1 DK NA:2013

Pressed steel elements and sheets, additions: EN 1993-1-3:2007, 2. edition, based on EN 1993-1-3/AC:2010, EN 1993-1-3 DK NA:2013